

CITCO Standard Grit Dressing System

Economical grit diamond dressing tools




Proven solution at a lower cost

Extended wheel life and improved production

- Backed by Fives' leading customer service & support
- In stock for immediate delivery
- Uniform diamond dispersion incorporating a pelletizing manufacturing process
- Consistent diamond distribution for more consistent performance
- Made in the U.S.A. with Fives' best-in-class manufacturing processes

“The CITCO standard grit diamond dressing system features a 1/2” usable depth that is a totally consumable grit slug.”


Tool type	Total diamond weight	Shank length & diameter	Grinding wheel diameter
1AC	2.75 carats	0.937" x 0.4358" (15° angle head)	< 20"
1A	2.75 carats	0.937" x 0.4358"	< 20"
2AE	1.75 carats	0.750" x 0.4358" (15° angle head)	14" - 20"
2AD	1.75 carats	0.750" x 0.4358"	14" - 20"
2RK	1.75 carats	1.187" x 0.4365"	< 18"

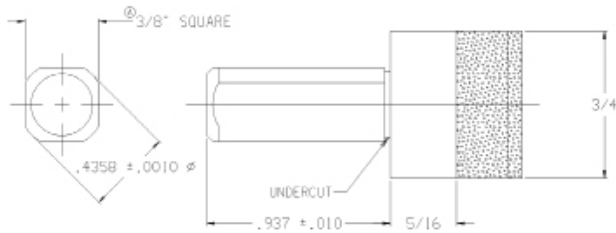

1A shown above featuring a straight head

CITCO GRIT DRESSING SYSTEM

- Suitable for truing cylindrical and standard surface abrasive grinding wheels
- Incorporates the CITCO Tools proprietary diamond disbursement method, guaranteeing consistent dressing performance
- Most suitable for aluminum oxide ceramic and resin bonded abrasive grinding wheels types

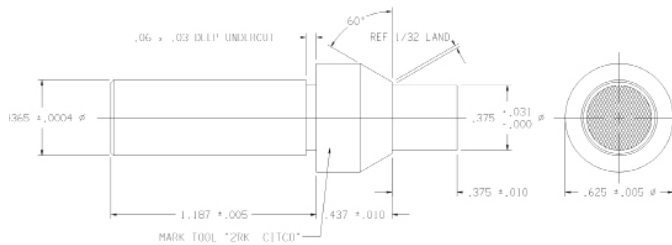

2RK shown above

CITCO STOCK DRESSING SYSTEM WHEEL TYPE APPLICATIONS:

- Aluminum oxide
- Ceramic
- Hybrid
- Resin
- Vitrified

The CITCO standard grit dressing system is an economical dressing solution serving centerless, double disc and cylindrical grinding applications. This disposable, non-resettable dressing system is in stock, ready for quick delivery and backed by Fives' expert customer service team.



CONTACT US:

Fives Landis Corp. - (CITCO Tools)
 7605 Discovery Lane - Concord Twp., OH 44077 - USA
 Tel: +1 440 709 0700 - Fax: +1 440 709 0710
 Email: citcoinfo@fivesgroup.com

www.fivesgroup.com